



#### 1007072090

# VMP-D619B

Desk/Wall Master Station Display and Handset

- O Desk master station with full access to all features in the Vingtor-Stentofon AlphaCom exchange
- Can be used as wall mounted station using the optional bracket 1008091100
- Easy operation provided by a 2 x 16 character alphanumeric display and ten direct access
- Queuing of incoming call requests according to priority and time of arrival, 256 priority levels
- Superb audio quality
- Handset for confidential conversations
- Advanced supervision functions





## Description

This combined desktop and wall mount master station has full access to all features of the Vingtor-Stentofon AlphaCom exchange of which many are developed specifically to provide critical communications such as group call, call priority and override of handset and speaker volume.

The station includes programmable single touch keys for fast access to important functions, a handset for confidentiality and a 2 x 16 character alphanumeric display which provides caller identification, on-line help and a directory service. A private/open switch allows for choosing between direct incoming calls and announcement of incoming calls by a ringing tone.


The station can also be used in a control room as it even provides call request queuing with incoming calls sorted on priority and time of arrival. The station provides high quality hands-free conversations, using the Vingtor-Stentofon superb wideband audio and loud volume. The station can be placed up to 4 km from the AlphaCom exchange without need for any local power source. The station uses the traditional 4-wire interface receiving both power and audio in the same

To provide maximum availability the station comes with advanced supervision functions. The station line test will detect whether there are any faults in the network or station electronics. In addition the station supports tone test, testing the complete transmission path including microphone and speaker. The status of the stations is reported to AlphaWeb as well as to 3rd party management systems using SNMP, Syslog or OPC. Station cables of different lengths, wall sockets and a bracket for wall mounting are available as accessories.

See also: additional documentation on wiki.zenitel.com

## **Technical Dimensions**

page 1/4

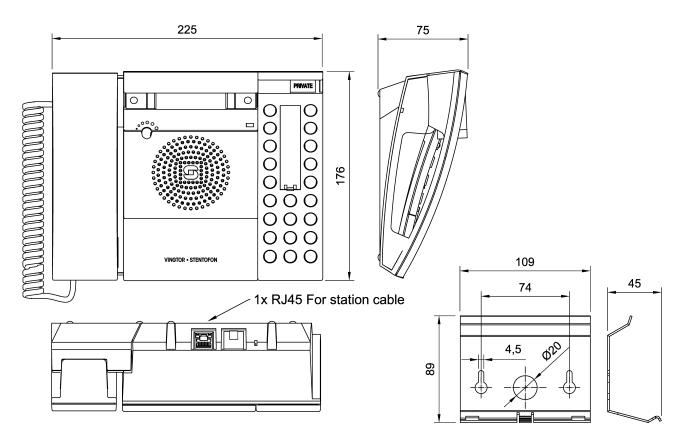

Wall bracket O.no. 1008091100

# Specifications

## **OPTIONAL ACCESSORIES**

1009800100	Desk/Wall Master Station accessory kit, recommended for	
	maritime installations	
3007600034	KB171 Wall Socket, RJ45, Surface Mounted	
1009800130	3 meters Station Cable with RJ45 Connector	
1009800115	0.5 meters Station Cable with RJ45 Connector	
1008091100	Wall bracket for Desk/Wall Station	

### **SPECIFICATIONS**

Supervision	Line supervision Tone test (manual and automatic) Station status in AlphaWeb	
Call indication	Red call LED	
Power	Powered from exchange	
Max cable distance	4.0 km (18 AWG - 0.9 mm) 3.4 km (20 AWG - 0.8 mm) 2.0 km (22 AWG - 0.6 mm) 1.4 km (24 AWG - 0.5 mm)	
Wiring	2 twisted pairs	
Connectors	RJ45	
Frequency range	200 - 10'000 Hz	
Loudspeaker output	Max. 1 W RMS	
Temperature	0 to +50°C	
Mounting	Desktop On wall with optional bracket	
Keypad	Full keypad including 10 DAK keys	
Display	Alphanumeric, 2x16 characters	
Weight	0.670 kg / 1.47 lbs.	
Dimension (WxHxD)	225 x 75 x 176 mm / 8.85 x 2.95 x 6.92 inch.	

## Accessories

page 3/4





KB171

Wall Socket

Wall Bracket for Desktop

page 4/4