

2131000206

VLS-15TF

Horn Loudspeaker 15W 100V with Fuse

- Robust and versatile horn speaker
- Suitable for outdoor installation in harsh environments
- Prepared for loop in/ loop out connection
- 1x M20 gland and 1x blind plug included




IP66

Description

- General purpose 15W horn loudspeaker with transformer and fuse
- Especially suitabable for use in industrial sites or tough environments
- ✓ To be used together with 100V line amplifier
- With 4 different power tappings: 2.5W, 5W, 10W and 15W

Technical Dimensions

page 1/4

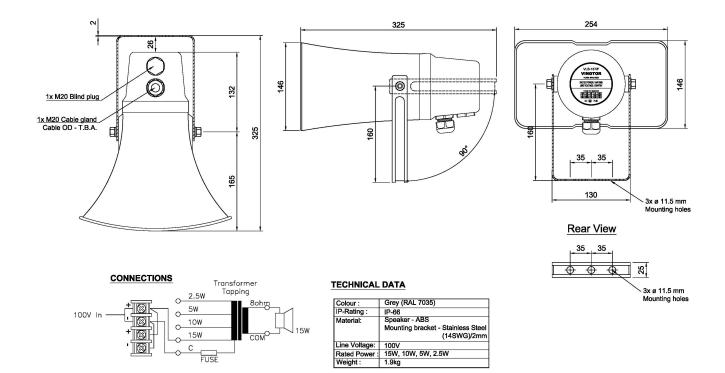

Specifications

GENERAL

Dimension (mm)	253W x 152H x 309D
Material, finish	ABS, grey
Mounting	Bracket, stainless steel grade 304
Connection	1x M20 gland and 1x blind plug included
Weight	1,85 kg
Rated power	15W rms
SPL at 1kHz	106dB/1W/1m - 118dB/15W/1 m
Effective frequency range	275 - 7000 Hz
Dispersion angle	60° x 90° (V x H)
IP rating	IP66
Temperature range	-40 °C - +55 °C
Power tappings	15/ 10/ 5/ 2,5 W
Impedance	670/ 1k/ 2k/ 4kΩ
Environmental Condition	Exposed

OTHER

010100007	Additional M20 cable gland for VLS-	
2131000207	15(TF)/VLS-30(TF). Not included and not	
	mounted.	

Accessories

page 3/4



VLS-GLAND

Cable gland for VLS-15/30

page 4/4