



4000011249

P-0005

Hearing-Protective Headset for substations

- ✓ Package contains stowage bracket
- ✓ Rugged headset for Industrial environments
- ✓ 10-meter cable and plug
- ✓ Low smoke and halogen free cable
- ✓ Excellent noise performance
- ✓ High attenuating ear shells
- ✓ CENELEC safety standards: EN 60079-0: 2012 + A11: 2013 EN 60079-11: 2012
- ✓ IEC safety standards: IEC 60079-0: 2011, IEC 60079-11: 2011




Onboard communication

Description

The P-0005 is a hearing-protective headset for use together with the Command Intercom System (Talk-Back) substations in noisy environments. The headset is equipped with high attenuating shells with optimised acoustic design and excellent room for the ears for the best possible sound quality and comfort. The headset has a quick positioning noise-cancelling boom microphone.

Technical Dimensions

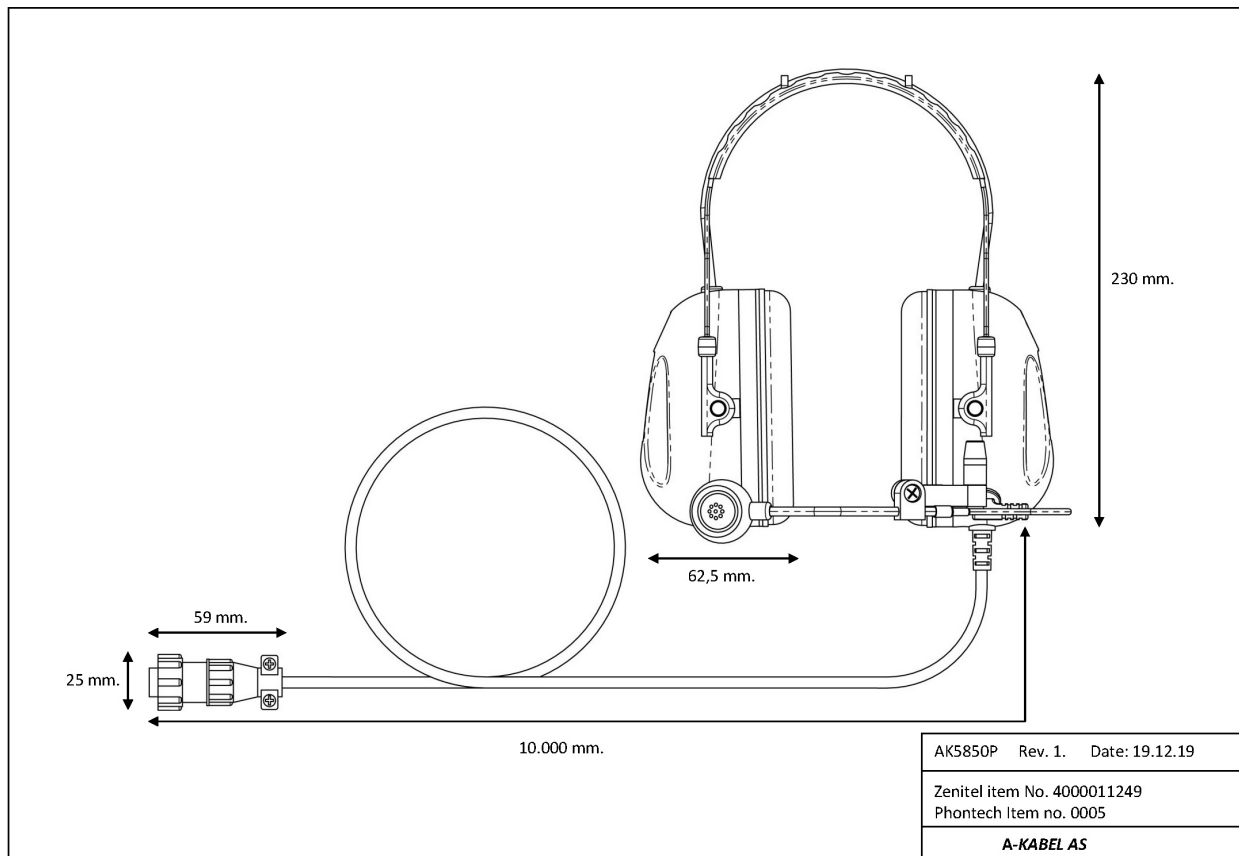

Specifications

MECHANICAL



Dimensions (HxW)	Approximately 230 x 125 mm
Weight	0.5 kg
Cable	10-meter flexible durable cable

ELECTRICAL

Termination	4-pin plug
Microphone	Dynamic, Noise Cancelling, -57+/-3dB (0dB=1V/pa 1 kHz), nom 230Ω
Earphone	27 mm. diameter, 150 Ohm+-15 %, Parallell connection, frequency response: 50Hz-10KHz.

ENVIRONMENTAL

Temperature	-30°C to +60°C
Humidity	<90% humidity, -20-+50°C
Ingress Protection Rating	IP-54 (when in use)
Attenuation Rating (HML)	H=31dB / M=26dB / L=20dB
Attenuation Rating (SNR)	29 dB

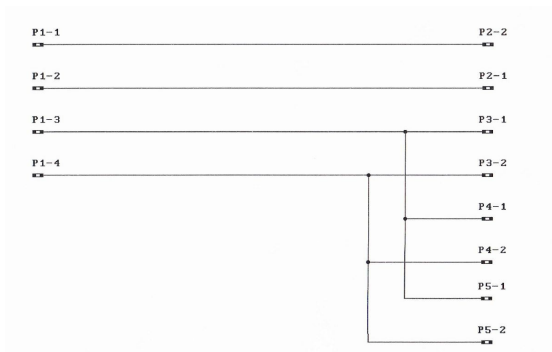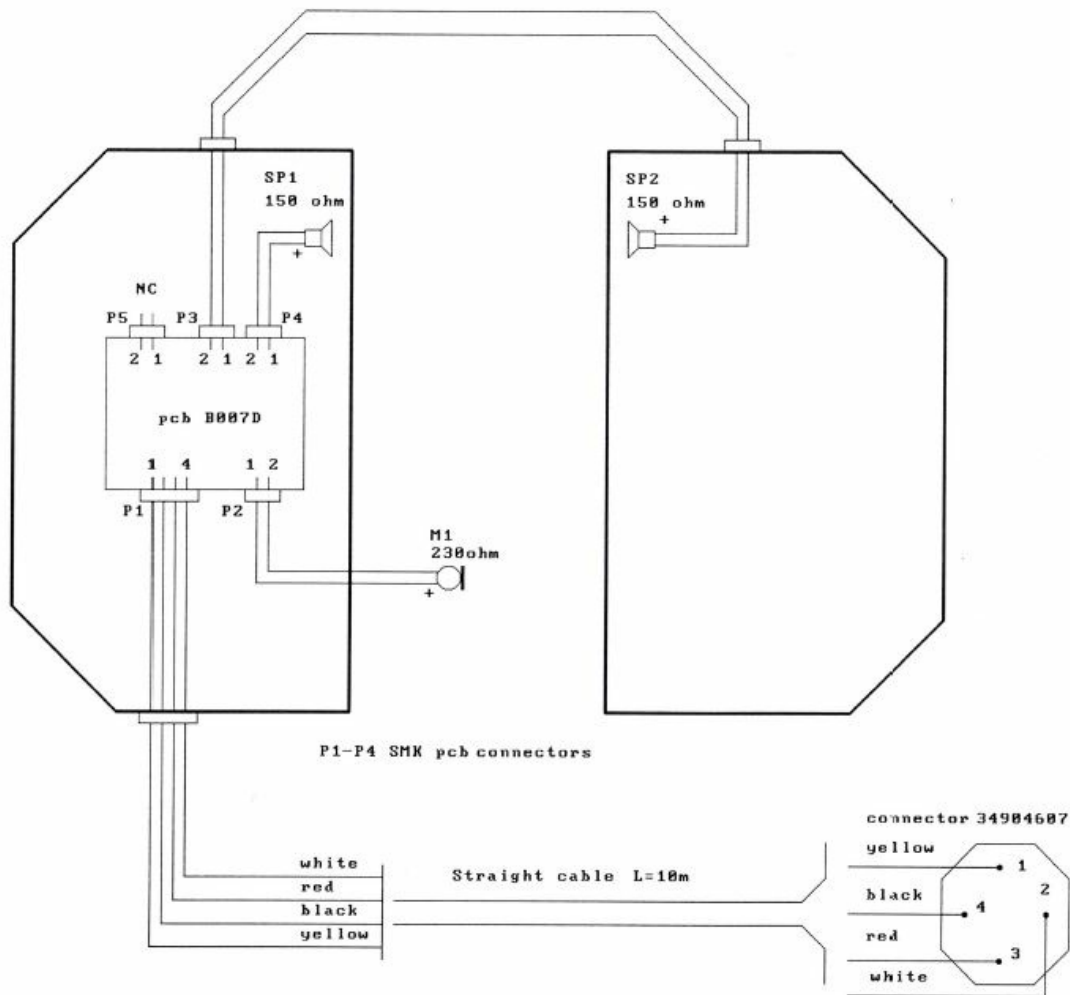

Accessories



Extension Cable for headset and hand microphone, 5 m



Extension Cable for headset and hand microphone, 10 m



Hygiene kit for Headset

Hygiene kit for Headset



Spare Boom Microphone for Headset

Spare Boom Microphone for all A-Kabel type Headsets



AK6070T Throat microphone for all A-kabel type Headsets

Dynamic Throat Microphone for Headset



Headset Stowage Bracket

Headset stowage Bracket for Wall mounting

Used With



P-9003

Substation for Headset



P-9016

Substation for Speaker



P-9011 Plugbox