


1200522065

BPC65

Battery Charging Unit including Mounting Tray - 65AH

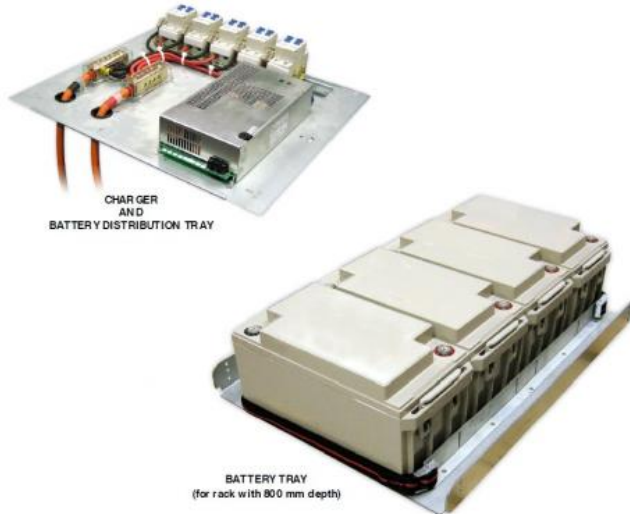

- ✓ EN 54-4 CERTIFIED
- ✓ SELF CONTAINED 65AH BATTERY CHARGER AND DISTRIBUTION
- ✓ SIMPLE 19" RACK MOUNT INSTALLATION
- ✓ MAINS, BATTERY AND CHARGER MONITORING
- ✓ FAULT RELAY OUTPUTS
- ✓ EXCLUDES THE BATTERIES



Civil Defence Approval

Commercial Audio



Voice Alarm



Public Address



EN 54 Certified

Description

The BPC65 is a self-contained 24V DC 19" rack mounting battery backup system for use with a 230V AC mains supply.

The battery pack provides 65AH of battery capacity, with a 6.5A recharge rate from the built-in charger unit, and with the charge voltage being temperature compensated to maximise battery life. The BPC65 is designed to comply with EN 54-16, ISO 7240-16 and BS 5839-8, and is fully monitored to the requirements of EN 54-4 and BS 5839-8, including monitoring for a high battery resistance in order to predict that the batteries are approaching their end of life. The fault indication is via LED indicators and a change-over relay fault output. Associated batteries sold separately.

Used With



V2000

PAVA 2000W Power Amplifier
Mainframe (0 amps Pre Installed)