

2340110041

SPA-W1-V2-MED

Weatherproof PA Panel



MED Certification




IP66

Description

- ✓ Weatherproof PA panel for single system
- ✓ Built-in pre-amplifier with preset signal level and tone controls
- ✓ Requires microphone with PTT
- ✓ Plug for WP handheld microphone P-66 or P-66/10
- ✓ Wall mounting outdoor / Indoor
- ✓ Local mute contact for external loudspeaker (from hardware version 4.0)

This waterproof panel gives All Call Message in a SPA-V2 public address and general alarm single system. Local mute function is used to break audio to loudspeakers where proximity to pa panel cause feedback.

Technical Dimensions

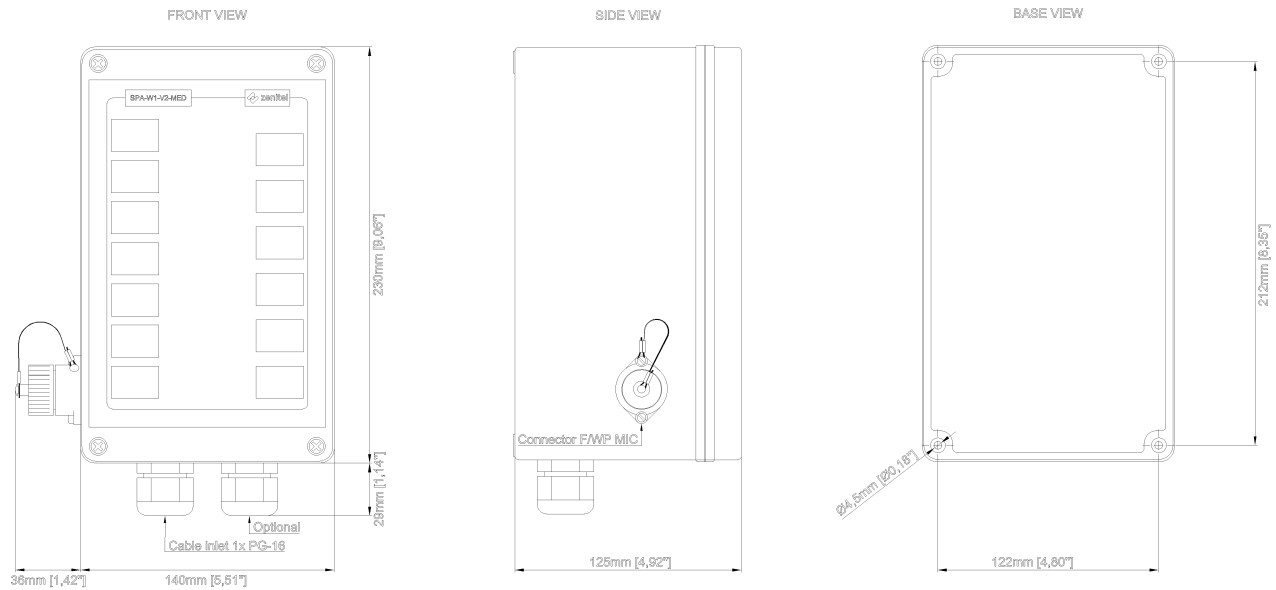

Specifications

GENERAL

Size (WxHxD)	140 x 230 x 125
Weight	0.5 kg
Material	ABS plastic
Mounting	Wall
Output signal	0.775Vrms / 0dB
Sensitivity microphone	200 ohm / 0,5mV
Connections	Plugable screw terminals for 2.5 mm 2 cable
Cable glands	2 x PG-16
Cable size	6 x 2 x 0.75mm ²
Protection	IP-66
Operating temperature	-25°C TO +55°C
EN60945 environmental category	Exposed
Compass safe distance	0.75 m

Accessories



P-66

Handheld Microphone
Waterproof

Item Number: 3005020039



P-66/10

Handheld Microphone with
10-Meter Cable Waterproof

Item Number: 3005020040