

2340110042

SPA-W1-D-MED

Dual Weatherproof PA Panel



MED Certification



IP66


Description

- ✓ Weatherproof PA panel for dual system
- ✓ Built-in pre-amplifier with preset signal level and tone controls
- ✓ Requires microphone with PTT
- ✓ Plug for WP handheld microphone P-66 or P-66/10
- ✓ Wall mounting outdoor / Indoor
- ✓ Local mute contact for external loudspeaker (from hardware version 4.0)

This waterproof panel gives All Call Message in a SPA-V2 public address and general alarm dual system.

Local mute function is used to break audio to loudspeakers where proximity to pa panel cause feedback. Available

Technical Dimensions

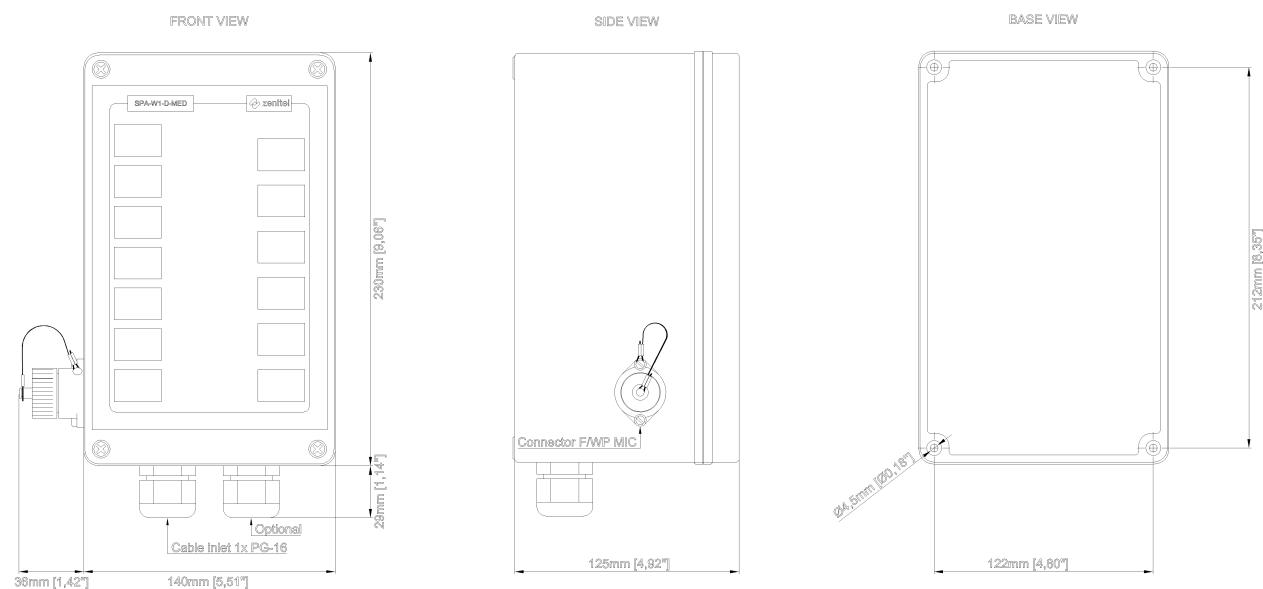

Specifications

GENERAL

Size (WxHxD)	140 x 230 x 125
Weight	0.5 kg
Material	ABS plastic
Mounting	Wall
Output signal	0.775Vrms / 0dB
Sensitivity microphone	200 ohm / 0.5mV
Connections	Plugable screw terminals for 2.5 mm ² cable
Cable glands	2 x PG-16
Cable size	6 x 2 x 0.75mm ²
Protection	IP-66
Operating temperature	-25°C TO +55°C
EN60945 environmental category	Exposed
Compass safe distance	0.75 m

Accessories



P-66

Handheld Microphone
Waterproof

P-66/10

Handheld Microphone with
10-Meter Cable Waterproof