


2340110045

SPA-W6A4-MED

Weatherproof PA and Alarm Panel 6 Zones

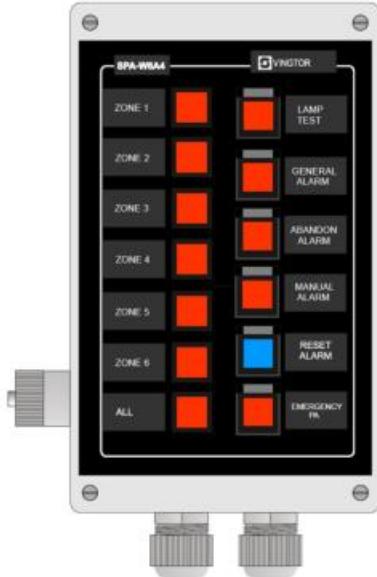

MED Certification



IP66

Description

- ✓ Weatherproof PA and Alarm panel for single system
- ✓ Abandon, general or manual alarm
- ✓ Contact for WP handheld microphone P-66 or P-66/10
- ✓ Built-in pre-amplifier with preset signal level and tone controls
- ✓ 6 zone selection buttons
- ✓ Alarm buttons with hinged transparent protecting cover for unauthorized use
- ✓ Requires microphone with push to talk (PTT)
- ✓ Plug for WP handheld microphone P-66 or P-66/10


page 1/3

- Replaceable text label to each button
- Wall mounting, outdoor or indoor
- Local mute contact for external loudspeaker (from hardware version 4.0)

This weatherproof panel is a combined alarm and PA panel for use in a SPA-V2 public address and general alarm single system. The PA part can operate six public address zones. Can be used as a PA-panel or Alarm panel or in combination. Sixteen different configuration of alarm sounds available.

Local mute function is used to break audio to loudspeakers where proximity to pa panel cause feedback. Available from hardware version 4.0. This function must be in combination with relay box.

Technical Dimensions

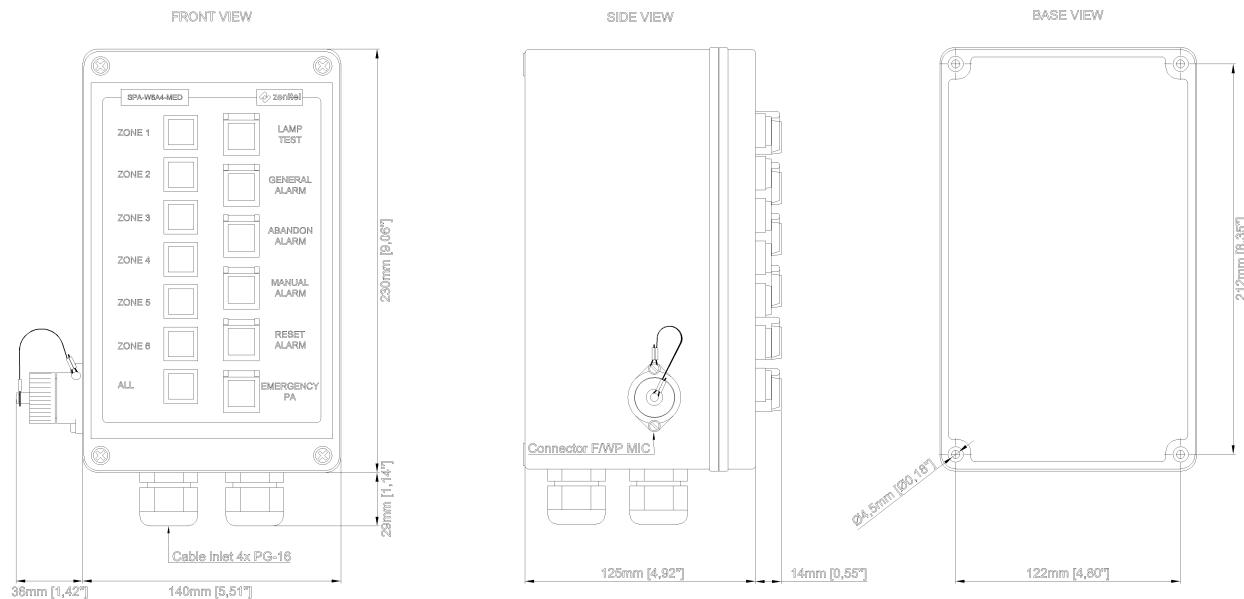

Specifications

GENERAL

| | |
|--------------------------------|--|
| Size (WxHxD) | 140 x 230 x 125 |
| Weight | 0.7 kg |
| Material | ABS plastic |
| Mounting | Wall |
| Output signal | 0.775Vrms / 0dB |
| Sensitivity microphone | 200 ohm / 0.5mV |
| Connections | Plugable screw terminals for 2.5 mm ² cable |
| Cable glands | 4x PG-16 |
| Cable size | 6 x 2 x 0.75mm ² |
| Protection | IP-66 |
| Operating temperature | -25°C TO +55°C |
| EN60945 environmental category | Exposed |
| Compass safe distance | 0.75 m |

Accessories



P-66

Handheld Microphone
Waterproof

P-66/10

Handheld Microphone with
10-Meter Cable Waterproof